



INTEGRATED NAVIGATION  
CONTROL SYSTEM

**H I B S**





## Specification

Panel: 10" to 24" LCD

Luminosity: 1000 cd/m<sup>2</sup> LED

Contrast: 1000:1

Viewing angle: Horizontal: 85°/85° Vertical: 85°/85°


Power supply :24 V DC (+30%/ -25%)

Power consumption approx:40 W (24 V DC)

Interfaces: 1 x CAN, 1 x USB-Out, 2 x DVI-In, 1 x VGA-In, Video-In

Degree of protection :IP 56


Dimensions: Width: 384 mm Height: 324 mm Depth: 107 mm

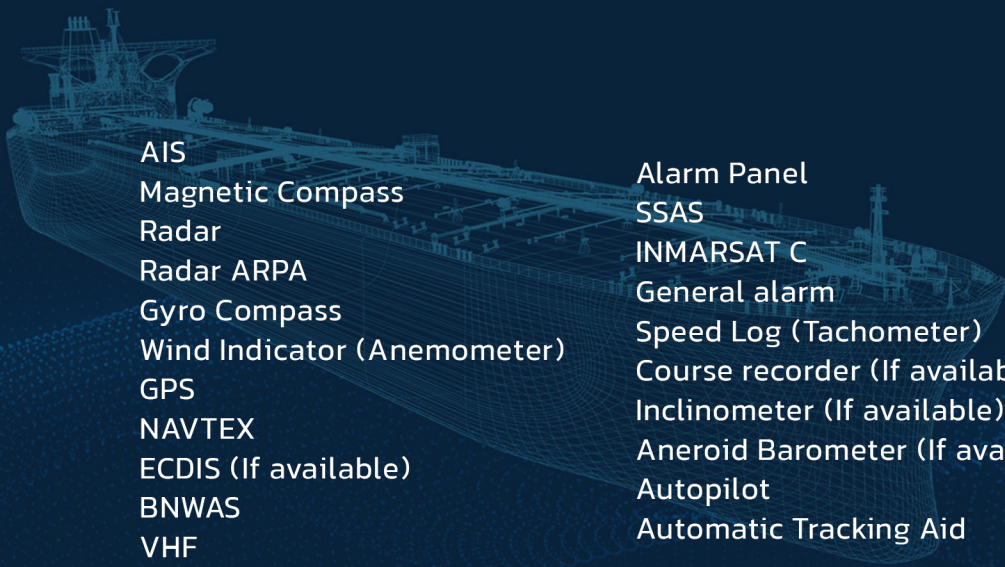

- AIS
- Magnetic Compass
- Radar
- Radar ARPA
- Gyro Compass
- Wind Indicator (Anemometer)
- GPS
- NAVTEX
- ECDIS (If available)
- BNWAS
- VHF
- Rudder Angle Indicator
- Echo sander

- Alarm Panel
- SSAS
- INMARSAT C
- General alarm
- Speed Log (Tachometer)
- Course recorder (If available)
- Inclinometer (If available)
- Aneroid Barometer (If available)
- Autopilot
- Automatic Tracking Aid

**HIBS**  
HOUNAMI INTEGRATED BRIDGE SYSTEM



Office



Navigational Bridge



Navigate Beyond the Horizon

[www.hounamioffshore.com](http://www.hounamioffshore.com)

